



lighting professional edition

Led components

TRONIX guided by light



Led components

The Essential Guide for Lighting Professionals

Unlock the full potential of LED lighting with this compact yet powerful guide. Featuring a handpicked selection of our top LED strips, control options, and Profiles, this guide provides all the essentials to elevate lighting projects with precision and ease.

Designed for seamless integration, our 24V LED strips work effortlessly with DALI, DMX, Casambi, Zigbee, and Dimmit, ensuring the perfect ambience. Whether it's Single Colour, Tunable White, RGB, or RGB(W).

Stay ahead with quick access to technical specs, product numbers, and key details. All LED components are in stock, with options for drop shipping and single-unit orders.

Tronix delivers high-quality, custom LED solutions, powering your creativity and making every project a success.






Office and showroom in
Uden, the Netherlands



This compact catalog contains a **selection of our assortment**.
Explore the full range of lighting and control solutions at
tronixlighting.com.




Order online?

Ask your personal login account
at sales@tronixlighting.com

Orders placed before
12.00h (GMT+1) will be
shipped the same day



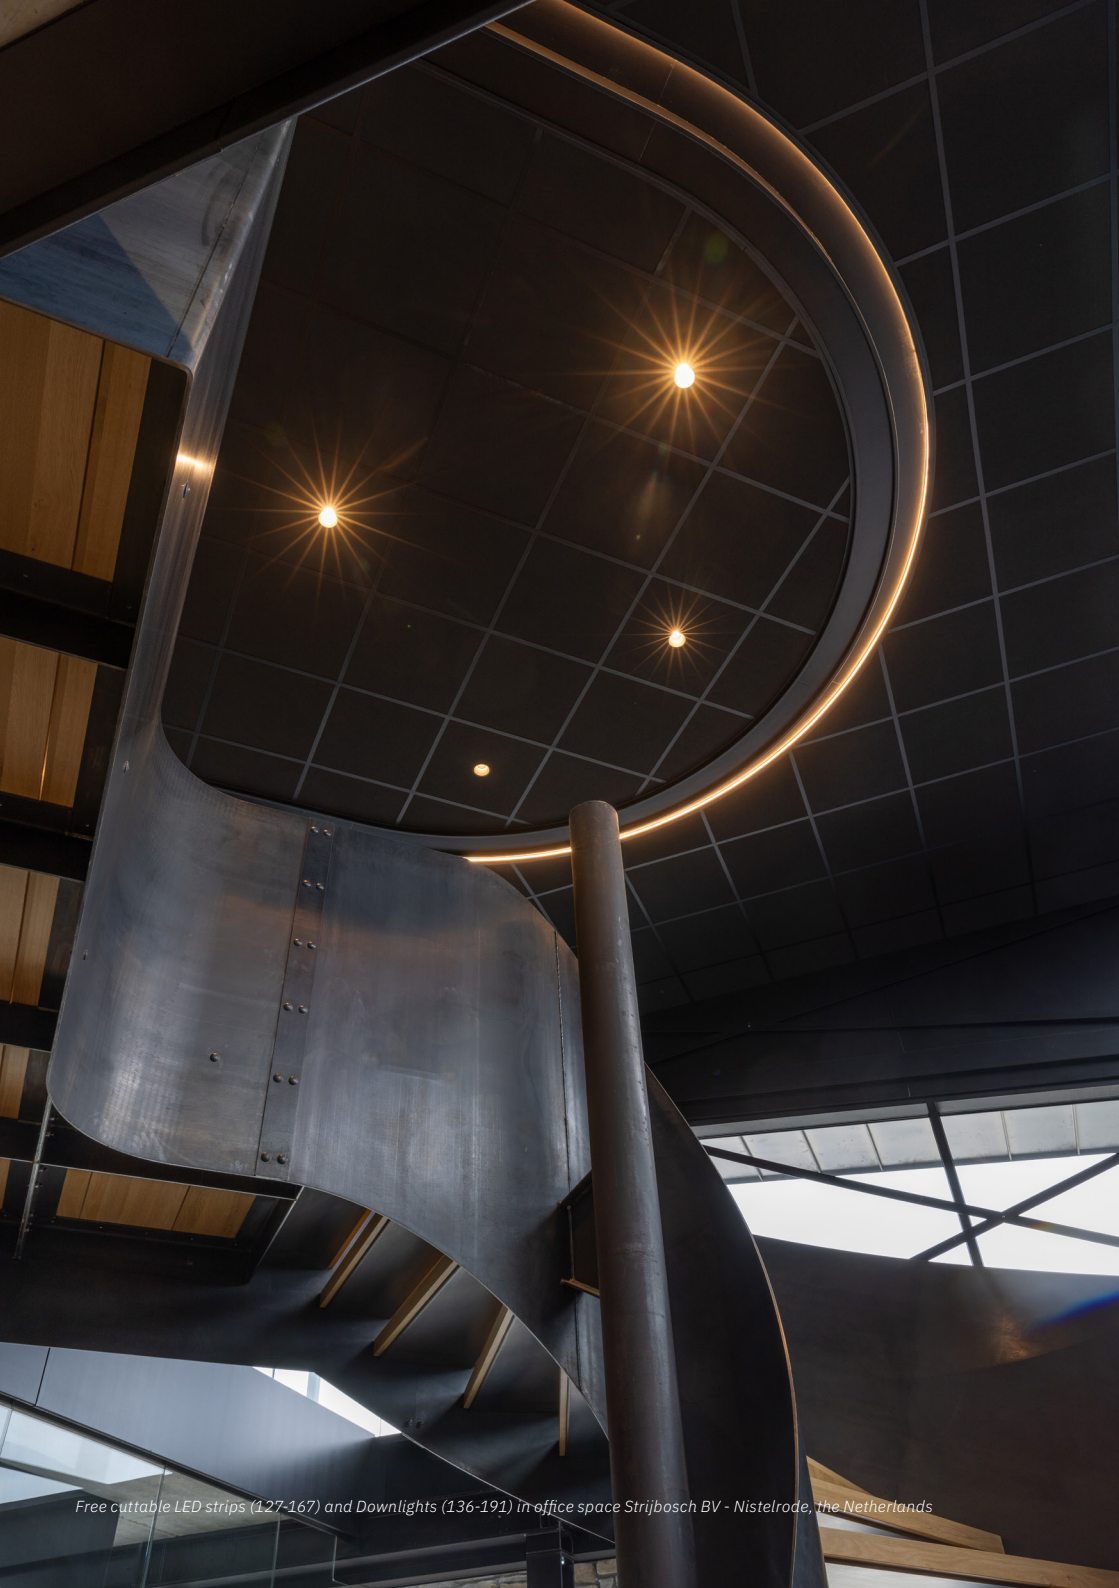

Free cuttable LED strips (127-167) and Downlights (136-191) in office space Strijbosch BV - Nistelrode, the Netherlands

Single Colour | LED Strips

LED STRIP COB | SINGLE COLOUR | FREE CUTTABLE

COB LED | Perfect for shallow Profiles or transparent covers. This COB LED strip delivers continuous, uniform illumination with no visible LED interruptions. Easily customizable to any length.



IP20

ART. NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	≡	LENGTH	SIZE (W X H)
127-169	IP20	2200K	10	630	60	>90	>60	Free	5 meter	8 x 2 mm
127-168	IP20	2400K	10	650	60	>90	>60	Free	5 meter	8 x 2 mm
127-167	IP20	2700K	10	730	70	>90	>60	Free	5 meter	8 x 2 mm
127-166	IP20	3000K	10	780	80	>90	>60	Free	5 meter	8 x 2 mm
127-165	IP20	4000K	10	820	80	>90	>60	Free	5 meter	8 x 2 mm
127-164	IP20	6500K	10	770	80	>90	>60	Free	5 meter	8 x 2 mm

IP65

ART. NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	≡	LENGTH	SIZE (W X H)
127-206	IP65	2700K	10	680	60	>90	>60	Free	5 meter	8 x 2 mm
127-207	IP65	3000K	10	800	80	>90	>60	Free	5 meter	8 x 2 mm
127-208	IP65	4000K	10	770	70	>90	>60	Free	5 meter	8 x 2 mm

IP20 50 METER

ART. NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	≡	LENGTH	SIZE (W X H)
127-219	IP20	2200K	10	920	90	>90	>60	Free	50 meter	8 x 2 mm
127-218	IP20	2400K	10	950	95	>90	>60	Free	50 meter	8 x 2 mm
127-217	IP20	2700K	10	730	100	>90	>60	Free	50 meter	8 x 2 mm
127-216	IP20	3000K	10	1080	110	>90	>60	Free	50 meter	8 x 2 mm
127-215	IP20	4000K	10	1110	110	>90	>60	Free	50 meter	8 x 2 mm

LED STRIP COB | SINGLE COLOUR | SMALL

COB LED | Perfect for shallow Profiles or transparent covers. The extra small LED strip delivers continuous, uniform illumination with no visible LED interruptions.



ART. NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	≡	LENGTH	SIZE (W X H)
127-158	IP20	2700K	5	300	60	>90	>60	50 mm	5 meter	4 x 2 mm
127-157	IP20	3000K	5	520	100	>90	>60	50 mm	5 meter	4 x 2 mm
127-156	IP20	4000K	5	520	100	>90	>60	50 mm	5 meter	4 x 2 mm
127-155	IP20	6500K	5	500	100	>90	>60	50 mm	5 meter	4 x 2 mm



2700K LED strips (1.27-183) in an atmospheric wine cellar of a luxury city villa - Den Bosch, the Netherlands

Single Colour | LED Strips

LED STRIP | 120 LED/M | SINGLE COLOUR

SMD2010 | 120 LED/M led-strip Single Colour.



3M



ART. NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	✂	LENGTH	SIZE (W X H)
127-174	IP20	2300K	9,6	520	50	>95	>60	50 mm	5 meter	8 x 1,4 mm
127-173	IP20	2700K	9,6	810	80	>95	>60	50 mm	5 meter	8 x 1,4 mm
127-172	IP20	3000K	9,6	840	90	>95	>60	50 mm	5 meter	8 x 1,4 mm
127-171	IP20	4000K	9,6	830	90	>95	>60	50 mm	5 meter	8 x 1,4 mm

LED STRIP | 240 LED/M | SINGLE COLOUR

SMD2010 | 240 LED/M led-strip Single Colour.



3M



ART. NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	✂	LENGTH	SIZE (W X H)
127-183	IP20	2700K	19,2	1530	80	>95	>60	25 mm	5 meter	10 x 1,4 mm
127-182	IP20	3000K	19,2	1680	90	>95	>60	25 mm	5 meter	10 x 1,4 mm
127-181	IP20	4000K	19,2	1480	80	>95	>60	25 mm	5 meter	10 x 1,4 mm

LED Strips | Philips

FORTIMO LEDFLEX COB | 1000LM/M | SINGLE COLOUR

The Philips Fortimo Single Colour LED strip is designed for shallow profiles with transparent covers. It ensures uniform, uninterrupted illumination, delivering a sleek and seamless glow for a wide range of applications.



ART. NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	✂	LENGTH	SIZE (W X H)
127-670	IP20	2700K	12,4	1000	80	>90	50	45,45 mm	5 meter	10 x 1,9 mm
127-671	IP20	3000K	12	1360	100	>90	50	45,45 mm	5 meter	10 x 1,9 mm

FORTIMO LEDFLEX | 1000/1500/2000 LM/M SINGLE COLOUR

Philips Fortimo LED Strip Single Colour | 1000 lm/m up to 12 meters, 1500 lm/m up to 9 meters, and 2000 lm/m up to 6.5 meters powered from one side.



ART. NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	✂	LENGTH	SIZE (W X H)
127-600	IP20	2700K	8,6	1000	110	>90	50	50 mm	5 meter	8 x 2 mm
127-615	IP20	2700K	13,2	1500	110	>90	50	50 mm	5 meter	8 x 2 mm
127-630	IP20	2700K	18,0	2000	100	>90	50	50 mm	5 meter	8 x 2 mm
127-631	IP20	3000K	17,1	2000	120	>90	50	50 mm	5 meter	8 x 2 mm
127-632	IP20	4000K	16,0	2000	120	>95	50	50 mm	5 meter	8 x 2 mm

Tuneable White & Dim to Warm | LED Strips

LED STRIP COB | TUNEABLE WHITE 2200K~6000K

COB LED | Designed for use in shallow Profiles or Profiles with a transparent cover. The LED strip is adjustable in light colour (2200K~6500K) and provides uniform light distribution with no visible LED interruptions.



3M



ART. NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	☞	LENGTH	SIZE (W X H)
127-129	IP20	🟡🟢 2200-6000K	15	1340	80	>90	>60		27,8 mm	5 meter 10 x 2 mm

LED STRIP | TUNEABLE WHITE | 1800K~6500K

SMD2210 | 364 LED/M adjustable light colour 1800K~6500K.



3M



ART.NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	✂	LENGTH	SIZE (W X H)	
127-189	IP20	☀️ 1800-6500K	20	1710	80	>90	>60		38,46 mm	5 meter	10 x 1,4 mm

LED STRIP | DIM TO WARM | 1800K~3000K

SMD2216 | 224 LED/M adjustable light colour 1800K~3000K.



3M



ART. NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	✂	LENGTH	SIZE (W X H)
127-138	IP20	🟡 1800-3000K	18	1380	80	>90	>60	62,5 mm	5 meter	10 x 1,2 mm



RGB(WW) LED strips (custom order), 24V LED power supply (215-408), and DMX wall controller (214-182) at FC Utrecht, Letex Lighting – Utrecht, the Netherlands.

RGB + Specials | LED Strips

LED STRIP COB | RGB & RGB + WARM WHITE

COB LED | RGB and RGB+warm white LED strip designed for use in shallow Profiles or Profiles with a transparent cover. Provides uniform light distribution with no visible LED interruptions.



3M



ART. NR.	IP	RGB	CCT	WATT/M	LUMEN/M	LUMEN/W	CRI	∞	LENGTH	SIZE(WXH)
127-133	IP20		42.300	-	15	640	40	-	55,5	5 meter 12 x 2 mm
127-134	IP20		42.300		2700K	16	370	80	>90	33,3 mm 5 meter 12 x 2 mm

LED STRIP RGB + WARM WHITE

SMD5050 LED | 60/96 LED/M RGB+warm white LED strip.



3M



ART. NR.	IP	RGB	CCT	LED/M	WATT/M	LUMEN/M	LUMEN/W	∞	LENGTH	SIZE(WXH)
127-075	IP20		42.300		2700K	60	19,2	380	80	100 mm 5 meter 12 x 2 mm
127-079	IP20		42.300		2700K	96	30,6	1650	60	62,5 mm 5 meter 12 x 2 mm
127-084	IP65		42.300		2700K	60	19,2	360	70	100 mm 12,2 x 2,2 mm

LED STRIP RGB SPI

WS2811 LED | 840 LED/M RGB (20 pixel p/m)



3M



ART. NR.	IP	RGB	CCT	LED/M	WATT/M	LUMEN/M	LUMEN/W	∞	LENGTH	SIZE(WXH)
127-136	IP20		42.300	-	814	22	810	40	50 mm	5 meter 12 x 2 mm

LED STRIP COB | SIDE-OUTPUT | 2700K

Flexible, freely cuttable side-emitting LED strip with a power output of 10 W/m and a 180° beam angle. Ideal for creative applications involving curves, contours, or limited installation space.



3M



ART. NR.	IP	COLOUR	WATT/M	LUMEN/M	LUMEN/W	CRI	R9	∞	LENGTH	SIZE(WXH)
127-178	IP20		2700K	10	290	30	>90	>60	Free	5 meter 8 x 2 mm

Non Dimmable Drivers

POWER SUPPLY | 24V | IP20 | 4W

24V LED power supply with a maximum power of 4 watts in a compact design.



Input voltage: 220 - 240V
IP rate: IP20
Power factor: >0,55
Connection: Stripped wire
Ambiant temperature: -20°C / +50°C



ART. NR.	MAX. POWER	SIZE (L X W X H)
215-082	4 Watt	38 x 27 x 21 mm

POWER SUPPLY | 24V | IP20 | 6W

24V LED power supply with a maximum power of 6 watts in a compact design.



Input voltage: 220 - 240V
IP rate: IP20
Power factor: >0,55
Connection: Terminal block
Ambiant temperature: -20°C / +50°C



ART. NR.	MAX. POWER	SIZE (L X W X H)
215-084	6 Watt	50 x 32 x 18,5 mm

POWER SUPPLY | 24V | IP20 | 18/40/75/150W

24V LED power supply 'block type' with a maximum power of 18W, 40W, 75W, or 150W.



Input voltage: 220 - 240V
IP rate: IP20
Power factor: >0,9
Connection: Terminal block
Ambiant temperature: -20°C / +50°C



ART. NR.	MAX. POWER	SIZE (L X W X H)
215-006	18 Watt	115 x 45 x 21 mm
215-414	40 Watt	166 x 52 x 24 mm
215-403	75 Watt	184 x 61 x 32 mm
215-408	150 Watt	210 x 67 x 34 mm

Non Dimmable Drivers

POWER SUPPLY | 24V | IP20 | 30/60/100/150/240W

24V LED power supply 'line type' with a maximum power of 30W, 60W, 100W, 150W, or 240W.



Input voltage: 220 - 240V

IP rate: IP20

Power factor: >0,9

Connection: Terminal block

Ambient temperature: -20°C / +50°C

ART. NR.	MAX. POWER	SIZE (L X W X H)
215-421	30 Watt	251 x 30 x 16 mm
215-422	60 Watt	305 x 30 x 17 mm
215-423	100 Watt	312 x 30 x 18,5 mm
215-424	150 Watt	335 x 30 x 21,5 mm
215-425	240 Watt	360 x 32 x 22,5 mm



POWER SUPPLY PHILIPS | 24V | IP20 | 30/60/120/150/250W

Reliable and cost-effective 24V Philips LED power supplies. A must-have for projects where quality and affordability come first.



PHILIPS

Input voltage: 220 - 240V

IP rate: IP20

Power factor: >0,95

Connection: Terminal block

Ambient temperature: -20°C / +50°C

ART. NR.	MAX. POWER	SIZE (L X W X H)
215-441	30 Watt	135 x 36 x 25 mm
215-442	60 Watt	151,5 x 40,2 x 31 mm
215-443	120 Watt	253,2 x 42,5 x 31 mm
215-444	150 Watt	253,2 x 42,5 x 31 mm
215-445	250 Watt	335 x 30 x 21,5 mm



POWER SUPPLY | 24V | IP67 | 100/200/320W

24V LED power supply for outdoor use with a maximum power of 100W, 200W, or 320W.



Input voltage: 220 - 240V

IP rate: IP67

Power factor: >0,9

Connection: Stripped wire

Ambient temperature: -20°C / +40°C

ART. NR.	MAX. POWER	SIZE (L X W X H)
215-316	100 Watt	191 x 70 x 40 mm
215-318	200 Watt	225 x 70 x 40 mm
215-319	320 Watt	252 x 90 x 44 mm



Dimmable Drivers | TRAILING EDGE

POWER SUPPLY | 24V | IP20 | 12W | TRAILING EDGE

24V Trailing edge dimmable LED power supply with a maximum power of 12 watts.

Input voltage: 220 - 240V
IP rate: IP20
Dimming method: Trailing edge

Power factor: >0,95
Connection: Stripped wire
Ambient temperature: -20°C / +50°C



ART. NR.	POWER	SIZE (L X W X H)
215-019	2,4~12 Watt	50 x 48 x 24 mm

POWER SUPPLY | 24V | IP20 | 25W | TRAILING EDGE

24V Trailing edge dimmable LED power supply with a maximum power of 25 watts.

Input voltage: 220 - 240V
IP rate: IP20
Dimming method: Trailing edge

Power factor: >0,9
Connection: Terminal block
Ambient temperature: -20°C / +50°C



ART. NR.	POWER	SIZE (L X W X H)
215-404	2,4 ~ 25 Watt	122 x 52 x 30 mm

POWER SUPPLY SNAPPY | 24V | IP20 | 50W | TRAILING EDGE

24V SNAPPY Trailing edge LED power supply with a maximum power of 50 watts.

Input voltage: 220 - 240V
IP rate: IP20
Dimming method: Trailing edge
Power factor: >0,95
Connection: Terminal block
Ambient temperature: -20°C / +50°C



ART. NR.	POWER	SIZE (L X W X H)
215-520	19,2 ~ 50 Watt	177 x 57,8 x 21,8 mm

POWER SUPPLY | 24V | IP20 | 50/100W | TRAILING EDGE

24V Trailing edge dimmable LED power supply with a maximum power of 50W or 100W.

Input voltage: 220 - 240V
IP rate: IP20
Dimming method: Trailing edge

Power factor: >0,9
Connection: Terminal block
Ambient temperature: -20°C / +50°C



ART. NR.	POWER	SIZE (L X W X H)
215-014	12 ~ 50 Watt	184 x 61 x 32 mm
215-003	33,6 ~ 100 Watt	210 x 67 x 34 mm

TRAILING EDGE / DALI | Dimmable Drivers

POWER SUPPLY LTECH | 24V | IP20 | 36/75/150W | TRAILING EDGE

24V LTECH Trailing edge dimmable LED power supply with a smooth dimming experience and a dimming range from 100% to 0%.



LTECH

Input voltage: 220 - 240V

IP rate: IP20

Dimming method: Trailing edge / push dim

Power factor: >0,95

Connection: Terminal block

Ambiant temperature: -20°C / +50°C



ART. NR.	POWER	SIZE (L X W X H)
215-523	0 ~ 36 Watt	210 x 35 x 30 mm
215-521	0 ~ 75 Watt	293 x 43 x 30 mm
215-522	0 ~ 150 Watt	273 x 57 x 37 mm

POWER SUPPLY | 24V | IP67 | 200W | TRAILING EDGE

24V Trailing edge dimmable LED power supply with a maximum power of 200W. IP67-rated, suitable for outdoor applications.



Input voltage: 220 - 240V

IP rate: IP67

Dimming method: Trailing edge

Power factor: >0,95

Connection: Stripped wire

Ambiant temperature: -20°C / +50°C



ART. NR.	POWER	SIZE (L X W X H)
215-004	65 ~ 200 Watt	249 x 72 x 40 mm

POWER SUPPLY PHILIPS | 24V | IP20 | 30/60/100/200W | DALI

The Philips DALI dimmable 24V LED driver is designed for professional, dimmable LED applications. This driver supports both DALI2-protocol and a 'touch and dim' function, for simple mains-voltage control.



PHILIPS

Input voltage: 220 - 240V


Power factor: >0,95

IP rate: IP20

Dimming method: DALI2

Connection: Screw connection

Ambiant temperature: -20°C / +50°C

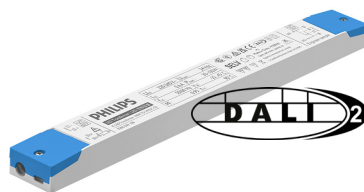

ART. NR.	POWER	SIZE (L X W X H)
215-453	0 ~ 30 Watt	300 x 30 x 16 mm
215-454	0 ~ 60 Watt	350 x 30 x 18 mm
215-455	0 ~ 100 Watt	350 x 30 x 18 mm
215-456	0 ~ 200 Watt	400 x 40 x 22 mm

Single Colour | RF

CONSTANT VOLTAGE RECEIVER | 1X 8A

Single-channel (8A) receiver for constant voltage (12-36 VDC), suitable for Single Colour lighting. Ensures smooth, flicker-free dimming from 100% to 0.1%. Multiple zones can be controlled individually or synchronized within a 20-meter range.

Input voltage: 12 - 36V
IP rate: IP20
Connection: Terminal block



ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-147	192W (24V)	1x 8.000 mA	101 x 36 x 21 mm

CONSTANTE VOLTAGE RECEIVER | 4 x 5A

RF receiver with a four-channel module (5A per channel) for constant voltage, suitable for Single Colour LED lighting. Ensures smooth, flicker-free dimming from 100% to 0.1%.

Input voltage: 12 - 36V
IP rate: IP20
Connection: Terminal block



ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-132	4x 120W (24V)	4x 5.000mA	178 x 45 x 19 mm

PUSH DIMMER | WIRELESS | 1/2 ZONES

RF LED dimmer with a glass housing for wireless switching and dimming via a push button. Suitable for Single Colour LED strips.

Battery: CR2430 (included)
IP rate: IP20
Range: <20 meter

Material: Glass
Colour: White/black



ART. NR.	COLOUR	ZONES	SIZE (L X W X H)
214-144	White	1	86 x 86 x 13,8 mm
214-186	Black	1	86 x 86 x 13,8 mm
214-152	White	2	86 x 86 x 13,8 mm

ROTARY DIMMER | WIRELESS | 1 ZONE

RF LED dimmer with a glass housing for wireless switching and dimming via a rotary and push button. Suitable for Single Colour LED strips.

Battery: CR2430 (included)
IP rate: IP20
Range: <20 meter

Material: Glass
Colour: White



ART. NR.	ZONES	SIZE (L X W X H)
214-145	1	86 x 86 x 27 mm

RF | Single Colour

COMPACT REMOTE CONTROL | 1 ZONE

This compact RF LED dimmer switches and dims LED lighting from 100% to 0.1% via 256 logarithmic levels. Suitable for wireless dimming of Single Colour LED strips.



Battery: CR2025 (included)
IP rate: IP20
Range: <20 meter

Material: PC
Colour: White/grey



ART. NR.	Colour	ZONES	SIZE (L X W X H)
214-130	Grey	1	Ø32 mm x 9,8 mm
214-134	White	1	Ø32 mm x 9,8 mm

REMOTE CONTROL | 1 ZONE

RF remote control for switching and dimming Single Colour LED lighting.



Battery: CR2025 (included)
IP rate: IP20
Range: <20 meter

Material: PC
Colour: Black



ART. NR.	ZONES	SIZE (L X W X H)
214-146	1	141 x 34 x 8,5 mm

REMOTE CONTROL | 5 ZONES

Remote control with switch and dimming function (256 levels, dimming from 100% to 0.1%). Operates via RF signal and is suitable for switching or dimming Single Colour LED lighting.



Battery: CR2025 (included)
IP rate: IP20
Range: <20 meter

Material: PC
Colour: Black



ART. NR.	ZONES	SIZE (L X W X H)
214-131	5	136,3 x 38,9 x 10,7 mm

TABLETOP REMOTE CONTROL | 1 ZONE

Compact tabletop remote control with a built-in RF receiver for wireless dimming of Single Colour lighting. Easily pairs with universal RF receivers. Suitable for dimming a single zone.



Battery: CR2025 (included)
IP rate: IP20
Range: <20 meter

Material: PC
Colour: Black



ART. NR.	ZONES	SIZE (L X W X H)
214-173	1	96 x 65 x 74 mm

Tuneable White | RF

RF | RGB(W) OR TW CONTROLLER | 12V ~ 36V | 4X 5A

RF receiver with a four-channel module (5A per channel) for constant voltage, programmable for up to eight remote controls. Suitable for RGB(W) or Tunable White LED lighting. Compatible with various RF remote controls. Ensures smooth, flicker-free dimming from 100% to 0.1%.

Input voltage: 12 - 36V
IP rate: IP20
Connection: Screw connector



ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-143	4x 120 Watt (24V)	4x 5.000mA	178 x 46 x 22 mm

WALL CONTROLLER | TUNEABLE WHITE

RF push dimmer for wireless switching and dimming of Tuneable White lighting. Can be controlled by up to eight remote controls per receiver. Optional wall mounting. One switch for dimming, one for adjusting the light colour.

Battery: CR2025 (included)
IP rate: IP20
Range: <20 meter

Material: Glass
Colour: White



ART. NR.	ZONES	SIZE (L X W X H)
214-172	1	86 x 86 x 14 mm

TTABLETOP REMOTE CONTROL | TUNEABLE WHITE | 1 ZONE

Compact tabletop remote control with a built-in RF transmitter for wireless dimming and colour temperature adjustment of Tuneable White LED lighting. Adjust brightness from 100% to 1% and colour temperature from 6000K to 2700K (fixture dependent).

Battery: CR2025 (included)
IP rate: IP20
Range: <20 meter

Material: PC
Colour: Black



ART. NR.	ZONES	SIZE (L X W X H)
214-159	1	96 x 65 x 74 mm

REMOTE CONTROL | TUNEABLE WHITE | 4 ZONES

RF remote control for Tuneable White lighting with a colour wheel for quick colour adjustment. Control up to four zones separately or synchronously and choose from countless shades of white. Each zone offers three customizable scenes, plus ten built-in patterns with a pause function. Compatible with WiFi-RF receiver via an app.

Battery: 3x AAA (excluded)
IP rate: IP20
Range: <20 meter

Material: PC
Colour: Black



ART. NR.	ZONES	SIZE (L X W X H)
214-175	4	120 x 55 x 17 mm

RF | RGB(W)

RF | RGB(W) OF TW CONTROLLER | 12V ~ 36V | 4X 5A

RF receiver with a four-channel module (5A per channel) for constant voltage, suitable for Single Colour LED lighting. Compatible with various RF remote controls and dimmers. Ensures smooth, flicker-free dimming from 100% to 0.1%.

Input voltage: 12 - 36V

IP rate: IP20

Connection: Screw connector



ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-143	4x 120 Watt (24V)	4x 5.000mA	178 x 46 x 22 mm

REMOTE CONTROL | RGB(W) | 8 ZONES

RF remote control with a colour wheel for precise colour adjustment. Control up to eight zones individually or synchronously, with countless colour options and ten built-in patterns. The transition speed is adjustable across eight levels. Compatible with WIFI-RF receivers via an app (page 26).

Battery: 3x AAA (excluded)

IP rate: IP20

Range: <20 meter

Material: PC

Colour: Black



ART. NR.	ZONES	SIZE (L X W X H)
214-155	8	131,4 x 43,8 x 24,7 mm

REMOTE CONTROL | RGB(W) | 4 ZONES

RF remote control with a colour wheel for quick colour adjustment. Control up to four zones individually or synchronously, choose from countless colour options, and save three scenes per zone. Equipped with ten built-in patterns with a pause function. Compatible with WIFI-RF receivers via an app for iOS or Android.

Battery: 3x AAA (excluded)

IP rate: IP20

Range: <20 meter

Material: PC

Colour: Black



ART. NR.	ZONES	SIZE (L X W X H)
214-157	4	120 x 55 x 17 mm

REMOTE CONTROL RGB(W) | 2 ZONES

RF RGB(W) controller with a colour wheel for quick and precise colour adjustment. Control two zones individually or synchronously, regardless of the number of receivers per zone. Choose from countless colour combinations, save four scenes per zone, and adjust the colour transition speed across eight levels.

Battery: 3x AAA (excluded)

IP rate: IP20

Range: <20 meter

Material: PC

Colour: Black




ART. NR.	ZONES	SIZE (L X W X H)
214-142	2	131,4 x 43,8 x 24,3 mm

DALI

DALI2 | CONTROLLER | DT6/DT8 | 12 ~ 36V | 5X 5A

This DALI-2 controller operates on constant voltage (12-36V), features five channels of 5000 mA (60-180W), and is designed for creating vibrant and dynamic light shows. Colour temperature and RGB colour can be adjusted via push dimming without an external DALI controller.

Input voltage: 12 - 36V
IP rate: IP20
Connection: Terminal block



ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-190	5x 120 Watt (24V)	5x 5.000mA	170 x 59 x 29 mm

DALI DIM MODULE | 12 ~ 36V | 1X 8A

DALI dimming module with a single constant voltage channel 12-36V (8A). Enables smooth, flicker-free dimming from 100% to 0% via 256-level logarithmic dimming and a unique DALI address.

Input voltage: 12 - 36V
IP rate: IP20
Connection: Terminal block



ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-156	192 Watt (24V)	1x 8.000mA	95 x 36 x 21 mm

DALI DIM MODULE | 230V | TRAILING EDGE DIMMABLE | 1X 1.8A

DALI dimming module with a single channel for connecting and dimming trailing edge dimmable Single Colour LED lamps within a DALI system.

Input voltage: 100 - 240V
IP rate: IP20
Connection: Terminal block



ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-177	200 Watt	1x 1.800mA	45,5 x 45 x 20,3 mm

DALI DIM MODULE | 230V | TRAILING EDGE DIMMABLE | 2X 1.2A

DALI dimming module with two channels for connecting and dimming trailing edge dimmable Single Colour LED lamps within a DALI system. Channels can be dimmed together or separately (1 or 2 addresses configurable).

Input voltage: 100 - 240V
IP rate: IP20
Connection: Terminal block



ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-176	2x 288 Watt	2x 1.200mA	170 x 59 x 29 mm

DMX DECODER | CONSTANT VOLTAGE | 3X 6A

DMX decoder with 3 channels, 3x 6A (12-24V), adjustable start address. Compatible with DMX 512.



Input voltage: 12 - 24V
IP rate: IP20
Connection: Terminal block



ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-113	3x 144 Watt (24V)	3x 6.000mA	127 x 42 x 33 mm

DMX DECODER | 12 ~ 36V | 4X 5A

DMX decoder with master mode, RDM function, and a total of 4 PWM output channels.



Input voltage: 12 - 36V
IP rate: IP20
Connection: Terminal block




ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-185	4x 120W (24V)	4x 5.000mA	170 x 53,4 x 28 mm

DMX DIM MODULE | 230V | TRAILING EDGE DIMMABLE | 2X 1.2A

DMX dimming module for integrating trailing edge dimmable LED lamps into a DMX512 system. Features a digital display for DMX address settings. Two channels (1200 mA / 120-288W), compatible with most DMX512 masters and trailing edge LED drivers. Channels can be controlled together or separately.



Input voltage: 100 - 240V
IP rate: IP20
Connection: Terminal block



DMX TO TRAILING EDGE

ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-181	2x 288W	2x 1.200mA	170 x 59 x 29 mm

DMX WALL CONTROLLER | 1/4 ZONES

DMX wall panel with one or four DMX zones and a colour wheel for precise control of DMX LED lighting (requires a separate 24V power supply).



Input voltage: 12 - 24V
IP rate: IP20
Connection: Terminal block

Material: Glass
Colour: Black/white

ART. NR.	Colour	ZONES	SIZE (L X W X H)
214-135	Black	1	86 x 86 x 29,1 mm
214-139	White	1	86 x 86 x 29,1 mm
214-182	Black	4	86 x 86 x 29,1 mm
214-183	White	4	86 x 86 x 29,1 mm



Glass

Casambi

CASAMBI DRIVER | 25W | 250~700MA | MAX. 54V | NFC

Casambi dimmable LED driver (25 W) with 1 or 2 channels (Single Colour or Tunable White applications). The output current can be configured via NFC, with control through the Casambi app or push-dim. Compact, efficient, and designed for professional indoor lighting.

Input voltage: 200 - 240V
IP rate: IP20
Connection: Terminal block

ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-226	25 Watt	250 - 700 mA	120 x 41 x 28 mm
214-227	25 Watt	2x 250 - 700 mA	120 x 41 x 28 mm



CASAMBI CONTROLLER | 12-48V | TW/RGB/RGBW/RGBTW

Casambi 7-in-1 controller for LED strips (12–48 V). Features 5 channels with selectable profiles for RGB(W), RGBTW, Tuneable White and single-colour control. Operate via Casambi app or (push) wall switch.

Input voltage: 12 - 48V
IP rate: IP20
Connection: Terminal block

ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-225	5x 192 Watt (24V)	5x 4000 mA	170 x 59 x 29 mm



CASAMBI DIMMER | 230V | 180W | RECESSED | LV PUSH DIM

Compact dimmer with Bluetooth 5.0, push-dim functionality, adjustable brightness levels and full Casambi integration for flexible, wireless lighting control in both professional and residential settings.

Input voltage: 220 - 240V
IP rate: IP20
Connection: Terminal block

ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-218	180 Watt	818 mA	45 x 45 x 22 mm



CASAMBI RECEIVER | 230V | 200W | RECESSED | 230V PUSH DIM

Casambi trailing-edge dimmer module for 100–240V, controllable via the Casambi app or a 230 V push button. Suitable for 2-wire and 3-wire installations. Compatible with dimmable LEDs, halogen lamps and retrofit projects.

Input voltage: 100 - 240V
IP rate: IP20
Connection: Terminal block

ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-219	100 Watt	1100 mA	42 x 38 x 16 mm



STAIN RELIEF FOR 214-219

Strain relief for the Tronix 214-219 Casambi dimmer. Provides safe cable entry and prevents cables from loosening or being damaged, ensuring a reliable and durable installation.

IP rate: IP20

ART. NR.	SIZE (L X W X H)
214-220	61 x 41 x 12 mm



DIN RAIL BRACKET FOR 214-219

DIN-rail bracket for the Tronix 214-219 Casambi dimmer. Enables mounting on a standardized metal DIN rail, commonly used for circuit breakers, power supplies and other electrical components.

IP rate: IP20

ART. NR.	SIZE (L X W X H)
214-221	43 x 38 x 4 mm



CASAMBI WALL SWITCH | 5 BUTTONS

Casambi remote control with push buttons and rotary knob. Compact, battery-powered, and wireless with a range of up to 50 metres. Easily switch between brightness, colour temperature, or RGB(W), or trigger scenes via the Casambi app.

Battery: 3V CR2450

IP rate: IP20

Material: Glass

Colour: White

ART. NR.	ZONES	SIZE (L X W X H)
214-222	5	58 x 58 x 20 mm



CASAMBI WALL SWITCH | RGBTW | 4 ZONES

Casambi RGBTW touch panel with glass front for local control of zones and scenes. Operates on 100–240V AC (IP20) and connects to the Casambi mesh network. Functions include zones 1–4, on/off, dimming, colour adjustment, and animation.

Input voltage: 100-240V

IP rate: IP20

Material: Glass

Colour: White

ART. NR.	ZONES	SIZE (L X W X H)
214-224	4	80 x 80 x 30 mm



Casambi

CASAMBI WALL SWITCH

With an electrodynamic energy generator (no battery required). Supplied with an 'Opus 55 Inform' frame, but can be replaced with other frames from the 55x55 mm series.



CASAMBI

Battery: N/A
IP rate: IP20
Material: PC
Colour: White



ART. NR.	TYPE	ZONES	SIZE (L X W X H)
214-204	Single	2	81 x 81 x 14 mm
214-199	Double	4	81 x 81 x 14 mm


CASAMBI SWITCH CONVERSION

To modify the Casambi wall switch 214-204 and 214-199 to a dark anthracite housing.



CASAMBI

IP rate: IP20
Material: PC
Colour: Anthracite

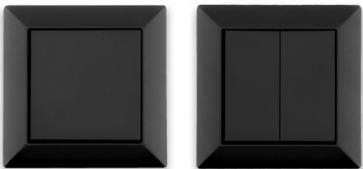

ART. NR.	SUITABLE FOR	SIZE (L X W X H)
214-210	214-204	81 x 81 x 14 mm
214-211	214-199	81 x 81 x 14 mm

CASAMBI SENSOR | MOTION + LIGHT

Motion sensor and ambient light sensor with built-in Bluetooth module.



CASAMBI

Input voltage: 220 - 240V
IP rate: IP44 (front)
Connection: Stripped wire
Material: PC
Colour: Black/white



ART. NR.	COLOUR	ZONES	DETECTION RADIUS	DETECTION RANGE	INSTALLATION HEIGHT	SIZE
214-202	○ White	64	100°	7 meter	3 meter	48 x Ø38 (Ø25 mm drillhole)
214-203	● Black	64	100°	7 meter	3 meter	48 x Ø38 (Ø25 mm drillhole)

CASAMBI SENSOR | RECESSED | PIR + LICHT + 0-10V

Casambi ceiling module with PIR and light sensor for autonomous 0-10V dimming. Operates on 12/24 VDC and is fully controllable via the Casambi app. Compact flush-mount design (Ø70-73 mm) and energy savings through daylight control.



CASAMBI

Input voltage: 12 - 24V
IP rate: IP20
Connection: Terminal block
Material: PC
Colour: White



ART. NR.	ZONES	DETECTION RADIUS	DETECTION RANGE	INSTALLATION HEIGHT	SIZE
214-223	1	90°	5 meter	3 meter	67 x Ø83 mm



Tronix RGB LED strips with Casambi control at Jumbo, DecoFred – Cuijk, the Netherlands


Zigbee

ZIGBEE RECEIVER | 12 ~ 36V | 1X 8A

1-channel Zigbee receiver with constant voltage, based on Zigbee 3.0, featuring an 8A output. Suitable for Single Colour LED lighting.

Input voltage: 12 - 36V
IP rate: IP20
Connection: Terminal block

ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-255	192 Watt (24V)	8.000mA	95 x 37 x 20 mm



ZIGBEE RECEIVER | 12 ~ 48V | 5X 5A

5-channel Zigbee receiver with constant voltage, based on Zigbee 3.0, featuring a 5A output. Suitable for RGB+TW/RGB(W)/RGB/TW LED lighting.

Input voltage: 12 - 48V
IP rate: IP20
Connection: Terminal block

ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-257	5x 120 Watt (24V)	5 x 5.000mA	170 x 59 x 29 mm




ZIGBEE RECEIVER | 230V | TRAILING EDGE DIMMABLE | 1X 1.8A

1-channel Zigbee receiver for connecting trailing edge dimmable LED lamps. Suitable for installation in 86x86 mm mounting boxes.

Input voltage: 100 - 240V
IP rate: IP20
Connection: Terminal block

ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-250	200 Watt	1.800mA	45,5 x 45 x 20,3 mm




ZIGBEE | DUBBLE WALL SWITCH | FRIENDS OF HUE

The switch can be configured via the Hue app and can switch and dim Hue lamps (10-30m). Direct wall mounting is possible with the included 3M tape or screws.

Battery: CR2430 (included)
IP rate: IP20
Range: <30 meter

Material: PC
Colour: White

ART. NR.	ZONES	SIZE (L X W X H)
214-270	4	80,5 x 80,5 x 14,7 mm



Zigbee

ZIGBEE | ROTARY DIMMER | RGB+TW/RGB(W)/RGB/TW/SC

This 4-in-1 dimmer can be configured via the Hue or Homey app and controls up to 30 lamps. The rotary knob allows dimming, colour adjustment, and on/off switching. Direct wall mounting is possible with the included 3M tape or screws.

Battery: CR2450 (included)
IP rate: IP20
Range: <30 meter

Material: PC
Colour: White



ART. NR.	ZONES	SIZE (L X W X H)
214-271	1	80,5 x 80x5 x 29,2 mm

ZIGBEE | REMOTE CONTROL | SINGLE COLOUR

Zigbee remote control with a dimming wheel, colour adjustment, and on/off switching. Suitable for Single Colour LED lighting.

Battery: 3x AAA (excluded)
IP rate: IP20
Range: <30 meter

Material: PC
Colour: Black



ART. NR.	ZONES	SIZE (L X W X H)
214-277	4	120 x 55 x 17 mm

ZIGBEE | REMOTE CONTROL | TUNEABLE WHITE

Zigbee remote control with a colour wheel and four groups, for controlling up to 30 devices within a 30-meter range. Suitable for Tunable White LED lighting.

Battery: 3x AAA (excluded)
IP rate: IP20
Range: <30 meter

Material: PC
Colour: Black



ART. NR.	ZONES	SIZE (L X W X H)
214-276	4	120 x 55 x 17 mm

ZIGBEE | REMOTE CONTROL | RGB+TW/RGB/RGB(W)

Zigbee remote control with a colour wheel and four groups, for controlling up to 30 devices within a 30-meter range. Suitable for RGB+TW, RGB, and RGB(W) LED lighting.

Battery: 3x AAA (excluded)
IP rate: IP20
Range: <30 meter

Material: PC
Colour: Black



ART. NR.	ZONES	SIZE (L X W X H)
214-275	4	120 x 55 x 17 mm

Dimmit

DIMMIT WIFI+RF RECEIVER | 12 ~ 24V

Tronix Dimmit WiFi receiver for constant voltage LED lighting. Features five configurable channels for Single Colour, Tunable White, RGB, RGB(W), and RGB(CCT) LED lighting.

Input voltage: 12 - 24V
IP rate: IP20
Connection: Terminal block



Dimmit



Combine with any (RF) Tunable White or RGB remote control (pages 18-19).

ART. NR.	MAX. POWER	MAX. CURRENT	SIZE (L X W X H)
214-315	5x 96 Watt (24V)	5X 4.000mA	145 x 46,5 x 16 mm

DIMMIT | WIFI RECEIVER | 230V | TRAILING EDGE DIMMABLE

Tronix Dimmit WiFi receiver. Suitable for 86x86 mm wall boxes and operable with a standard/universal push button or the Dimmit app.

Input voltage: 100 - 240V
IP rate: IP20
Connection: Terminal block



Dimmit



ART. NR.	MAX. POWER	SIZE (L X W X H)
214-300	200 Watt	45,5 x 45 x 20,3 mm


DIMMIT BLUETOOTH DIM MODULE | 0/1-10V | DALI DT6/DT8

Tronix Dimmit dim module. For controlling 0/10V or DALI LED lamps with Dimmit. No additional DALI power supply required.

Input voltage: 110 - 240V
IP rate: IP20
Connection: Terminal block



Dimmit

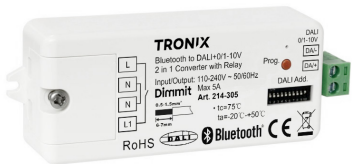

ART. NR.	MAX. POWER	SIZE (L X W X H)
214-305	1200 Watt	95 x 37 x 20 mm

Dimmit by Tronix: the all-in-one app for smart lighting control




Dimmit by Tronix is an all-in-one app that allows you to control all your smart lighting, dimmers and other smart products. Dimmit is compatible with all your existing smart lighting and voice controllers such as Alexa or Homey.


Changing the colour of your lighting? Accurate dimming? Setting scenes? These features are pretty standard nowadays. That's why Dimmit does more. You can link events to actions. Do you want your outdoor lights to switch on an hour before sunset every day? What about having the light colour in your living room change as soon as outdoor temperatures starts to drop? Or having your lights switched on automatically while you're on holiday? You name it, Dimmit does it.

Dimmit products can be taught in directly into the Dimmit app without an external gateway or bridge.

More information about Dimmit and the possibilities? Contact us on sales@tronixlighting.com
+31 (0)413 33 03 80

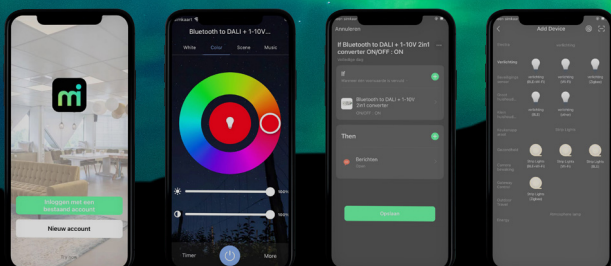

Full experience with Dimmit controlling components





LED strip (127-163) and 24V power supply (215-006) in the atmospheric restaurant STOKED - Uden, the Netherlands

Sensoren

IR MOTION SENSOR | CEILING | RECESSED | IP20

Recessed infrared motion sensor for suspended ceilings or ceilings with sufficient installation space.

Input voltage: 220 - 240V
Time delay: 10 sec. ~ 15 min.
Detection motion speed: 0,6 ~ 1,5 m/sec
Detection range: Max. 6 meter
Installation height: 2,2 - 4 meter

Switch-on threshold: 3 ~ 2000 lux
Size: Ø76 mm (inb. Ø61,5 x 75,6 mm)
IP rate: IP20
Connection: Terminal block



ART. NR.	MAXIMUM LOAD	DETECTION RADIUS
214-051	300 Watt	360°

IR MOTION SENSOR | CEILING | SURFACE | IP20

Surface infrared motion sensor.

Input voltage: 220 - 240V
Time delay: 10 sec. ~ 15 min.
Detection motion speed: 0,6 ~ 1,5 m/sec
Detection range: Max. 6 meter
Installation height: 2,2 - 4 meter

Switch-on threshold: 3 ~ 2000 lux
Size: Ø80 x 41 mm
IP rate: IP20
Connection: Terminal block



ART. NR.	MAXIMUM LOAD	DETECTION RADIUS
214-052	600 Watt	360°

IR MOTION SENSOR | WALL | RECESSED | IP20

Infrared motion sensor designed to replace existing light switches. Suitable for 2- or 3-wire connection (with or without a neutral wire).

Input voltage: 220V - 240V
Time delay: 10 sec. - 7 min.
Detection motion speed: 0,6 - 1,5 m/sec
Detection range: Max. 9 meter
Installation height: 1 - 1,8 meter

Switch-on threshold: 3 ~ 2000 lux
Size: 80 x 80 x 33,1 mm
IP rate: IP20
Connection: Terminal block



ART. NR.	MAXIMUM LOAD	DETECTION RADIUS
214-050	200 Watt	160°

IR MOTION SENSOR | CEILING | RECESSED | IP20

Recessed infrared motion sensor for suspended ceilings or ceilings with sufficient installation space.

Input voltage: 220 - 240V
Time delay: 10 sec. - 7 min.
Detection motion speed: 0,6 - 1,5 m/sec
Detection range: Max. 8 meter
Installation height: 1,8 - 2,5 meter

Switch-on threshold: 10 ~ 2000 lux
Size: 55,4 x 25,5 x 36,8 mm (power supply)
IP rate: IP20
Connection: Stripped wire



COMING
SOON! MORE
SENSORS

ART. NR.	MAXIMUM LOAD	DETECTION RADIUS
214-120	200 Watt	360°

Profiles | Surface

PO18 LED PROFILE 200 CM | LED STRIPS MAX. 6MM

This PO18 LED profile of 200 cm is suitable for LED strips up to 6 mm wide.




GALAXYprofiles

Type: Surface
Size: 2000 x 7,8 x 7 mm (L X W X H)
Max. width LED strip: 6 mm
Colour: Black (RAL9005) / aluminium
Material: Anodized aluminium



ART. NR.	COLOUR
8101062	● Black
8101060	● Aluminium



COVERS

ART. NR.	COLOUR	TYPE
8600106	○ Opal	C24N cover 65% 200 cm
8600107	○ Opal	C24N cover 65% 600 cm

END CAPS

ART. NR.	COLOUR	TYPE
8101065	● Grey	E64 end cap without cable entry
8101066	● Grey	E65 end cap with cable entry

Discover our full range
of LED Profiles online



Surface | Profiles

PO16 LED PROFILE 200/300 CM | LED STRIPS MAX. 8MM

This PO16 LED profile of 200/300 cm is suitable for LED strips up to 8 mm wide.



GALAXY profiles


Type: Surface

Size: 2000/3000 x 10 x 9,2 mm (L X W X H)


Max. width LED strip: 8 mm

Colour: Black (RAL9005) / aluminium

Material: Anodized aluminum

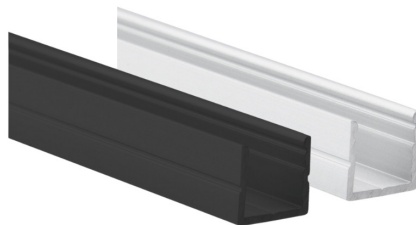

ART. NR.	COLOUR	LENGTH
8101051	● Black	200 cm
8101050	● Aluminium	200 cm
8101054	● Aluminium	300 cm



COVERS

ART. NR.	COLOUR	TYPE
8600046	○ Opal	C23 cover 65% 200 cm
8600047	○ Opal	C23 cover 65% 600 cm
8600074	● Black	C23 cover 25% 200 cm
8600075	● Black	C23 cover 25% 600 cm

END CAPS

ART. NR.	COLOUR	TYPE
8101055	● Grey	E62 end cap without cable entry
8101056	● Grey	E69 end cap with cable entry

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8101057	● Aluminium	Z20 mounting bracket

Profiles | Surface

PL1 LED PROFILE 200 CM | LED STRIPS MAX. 12MM

This PL1 LED profile of 200 cm is suitable for LED strips up to 12 mm wide.




GALAXY profiles

Type: Surface
Size: 2000 x 16,8 x 5,91 mm (L X W X H)
Max. width LED strip: 12 mm
Colour: Black (RAL9005) / aluminium / white (RAL9010)
Material: Anodized aluminum



ART. NR.	COLOUR
8106014	● Black
8106012	● Aluminium
8106013	○ White



COVERS

ART. NR.	COLOUR	TYPE
8600004	○ Opal	C1 cover 65% 200 cm
8600037	○ Opal	C1 cover 65% 600 cm
8600003	○ Clear	C2 cover 85% 200 cm
8600070	● Black	C1 cover 25% 200 cm
8600071	● Black	C32 cover 25% 600 cm

END CAPS

ART. NR.	COLOUR	TYPE
8106018	● Black	E1 end cap without cable entry
8106015	● Grey	E1 end cap without cable entry
8106017	○ White	E1 end cap without cable entry
8106112	● Black	E2 end cap with cable entry
8106110	● Grey	E2 end cap with cable entry
8106111	○ White	E2 end cap with cable entry

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8106211	● Black	Z01 mounting bracket
8106210	● Aluminium	Z01 mounting bracket
8106212	○ White	Z01 mounting bracket

Surface | Profiles

PL2 LED PROFILE 200 CM | LED STRIPS MAX. 12MM

This PL2 LED profile of 200 cm is suitable for LED strips up to 12 mm wide.



GALAXY profiles


Type: Surface

Size: 2000 x 16,8 x 13,01 mm (L X W X H)


Max. width LED strip: 12 mm

Colour: Black (RAL9005) / aluminium / white (RAL9010)

Material: Anodized aluminum

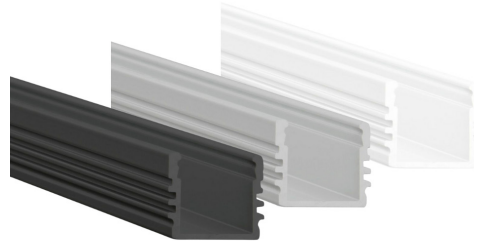

ART. NR.	COLOUR
8106024	● Black
8106022	● Aluminium
8106023	○ White



COVERS

ART. NR.	COLOUR	TYPE
8600004	○ Opal	C1 cover 65% 200 cm
8600037	○ Opal	C1 cover 65% 600 cm
8600003	○ Clear	C2 cover 85% 200 cm
8600070	● Black	C1 cover 25% 200 cm
8600071	● Black	C32 cover 25% 600 cm

END CAPS

ART. NR.	COLOUR	TYPE
8106127	● Black	E4 end cap without cable entry
8106125	● Grey	E4 end cap without cable entry
8106126	○ White	E4 end cap without cable entry
8106028	● Black	E5 end cap with cable entry
8106020	● Grey	E5 end cap with cable entry
8106027	○ White	E5 end cap with cable entry

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8106211	● Black	Z01 mounting bracket
8106210	● Aluminium	Z01 mounting bracket
8106212	○ White	Z01 mounting bracket

Profiles | Surface

PL5 LED PROFILE 200 CM | LED STRIPS MAX. 12MM

This PL5 LED profile of 200 cm is suitable for LED strips up to 12 mm wide.



GALAXYprofiles


Type: Surface
Size: 2000 x 16,8 x 12,41 mm (L X W X H)
Max. width LED strip: 12 mm
Colour: Black (RAL9005) / aluminium / white (RAL9010)
Material: Anodized aluminium



ART. NR.	COLOUR
8105204	● Black
8105201	● Aluminium
8105203	○ White

COVERS

ART. NR.	COLOUR	TYPE
8600005	○ Opal	C3 cover 65% 200 cm low
8600038	○ Opal	C3 cover 65% 600 cm low
8600006	○ Opal	C4 cover 65% 200 cm high
8600007	○ Opal	C5 cover 65% 200 cm round



END CAPS

ART. NR.	COLOUR	TYPE
8106051	● Black	E10 end cap without cable entry low/high
8106050	● Grey	E10 end cap without cable entry low/high
8106049	○ White	E10 end cap without cable entry low/high
8106054	● Black	E11 end cap with cable entry low/high
8106052	● Grey	E11 end cap with cable entry low/high
8106053	○ White	E11 end cap with cable entry low/high
8106157	● Black	E13 end cap without cable entry round
8106155	● Grey	E13 end cap without cable entry round
8106156	○ White	E13 end cap without cable entry round
8106059	● Black	E14 end cap with cable entry round
8106057	● Grey	E14 end cap with cable entry round
8106058	○ White	E14 end cap with cable entry round

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8106211	● Black	Z01 mounting bracket
8106210	● Aluminium	Z01 mounting bracket
8106212	○ White	Z01 mounting bracket

Surface | Profiles

SL15/NL15 LED CONSTRUCTIE PROFILE 200 CM | LED STRIPS MAX. 12MM

This SL15/NL15 LED profile of 200 cm is suitable for LED strips up to 12 mm wide.



GALAXY profiles


Type: Surface

Size: 2000 x 17,15 x 14,4 mm (L X W X H)

Max. width LED strip: 12 mm

Colour: Black (RAL9005) / aluminium / white (RAL9010)


Material: Anodized aluminum

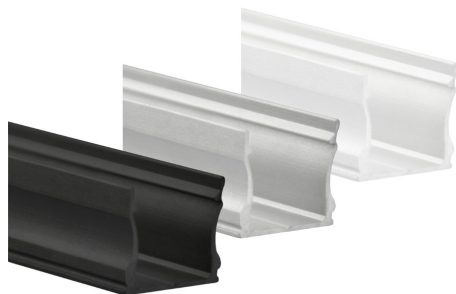

ART. NR.	COLOUR
8121120	● Black
8121100	● Aluminum
8121110	○ White

COVERS

ART. NR.	COLOUR	TYPE
8600085	○ Opal	C40 cover 65% 200 cm
8600088	○ Clear	C41 cover 85% 200 cm
8600100	● Black	C48 cover 25% 200 cm



END CAPS

ART. NR.	COLOUR	TYPE
8121054	● Black	E75 end cap without cable entry
8121050	● Grey	E75 end cap without cable entry
8121052	○ White	E75 end cap without cable entry
8121055	● Black	E76 end cap with cable entry
8121051	● Grey	E76 end cap with cable entry
8121053	○ White	E76 end cap with cable entry

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8121040	● Aluminium	Z31 mounting bracket

Profiles | Surface


PK1 LED PROFILE 200 CM | LED STRIPS MAX. 12MM

This PK1 LED profile of 200 cm is suitable for LED strips up to 12 mm wide.



GALAXYprofiles

Type: Surface
Size: 2000 x 15 x 6 mm (L X W X H)
Max. width LED strip: 12 mm
Colour: Black (RAL9005) / aluminium / white (RAL9010)
Material: Anodized aluminium

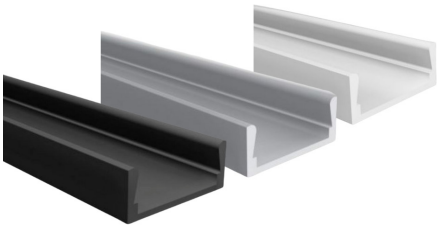

ART. NR.	COLOUR
8201026	● Black
8201025	● Aluminium
8201027	○ White

COVERS

ART. NR.	COLOUR	TYPE
8600004	○ Opal	C1 cover 65% 200 cm low
8600026	○ Opal	C1 cover 65% 250 cm low
8600080	○ Opal	C1 cover 65% 300 cm low
8600037	○ Opal	C1 cover 65% 600 cm low
8600003	○ Clear	C2 cover 85% 200 cm low
8600070	● Black	C32 cover 25% 200 cm low
8600071	● Black	C32 cover 25% 600 cm low



END CAPS

ART. NR.	COLOUR	TYPE
8305021	● Black	E223 end cap without cable entry
8305019	● Grey	E223 end cap without cable entry
8305023	○ White	E223 endcap without cable entry
8305022	● Black	E224 endcap with cable entry
8305020	● Grey	E224 endcap with cable entry
8305024	○ White	E224 endcap with cable entry

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8123328	● Aluminium	Z39 mounting bracket



Linear lighting with cover P014 (8600045) and PN133 (8105050) at a self-storage facility – Uden, the Netherlands

Profiles | Surface

SL8/NL8 LED CONSTRUCTION PROFILE 200 CM | LED STRIPS MAX. 14MM

This PL8/NL8 LED profile of 200 cm is suitable for LED strips up to 14 mm wide.




GALAXY profiles

Type: Surface
Size: 2000 x 17,15 x 7,40 mm (L X W X H)
Max. width LED strip: 14 mm
Colour: Black (RAL9005) / aluminium / white (RAL9010)
Material: Anodized aluminium



ART. NR.	COLOUR
8121020	● Black
8121000	● Aluminium
8121010	○ White



COVERS

ART. NR.	COLOUR	TYPE
8600085	○ Opal	C40 cover 65% 200 cm
8600088	○ Clear	C41 cover 85% 200 cm
8600100	● Black	C48 cover 25% 200 cm

END CAPS

ART. NR.	COLOUR	TYPE
8121054	● Black	E75 end cap without cable entry
8121050	● Grey	E75 end cap without cable entry
8121052	○ White	E75 end cap without cable entry
8121055	● Black	E76 end cap with cable entry
8121051	● Grey	E76 end cap with cable entry
8121053	○ White	E76 end cap with cable entry

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8121040	● Aluminium	Z31 mounting bracket

Surface | Profiles

PN8 LED PROFILE 200 CM | LED STRIPS MAX. 16MM

This PN8 LED profile of 200 cm is suitable for LED strips up to 16 mm wide.



GALAXY profiles


Type: Surface

Size: 2000 x 19,2 x 18,1 mm (L X W X H)

Max. width LED strip: 16 mm


Colour: Black (RAL9005) / aluminium / white (RAL9010)

Material: Anodized aluminium

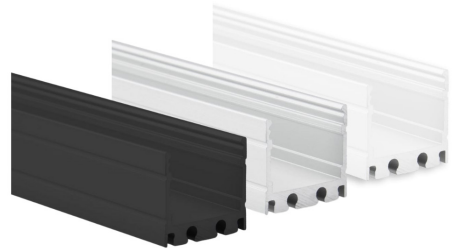

ART. NR.	COLOUR
----------	--------

8101022	● Black
8101020	● Aluminium
8101021	○ White



COVERS

ART. NR.	COLOUR	TYPE
----------	--------	------

8600048	○ Opal	C20 cover 65% 200 cm low
8600049	○ Opal	C20 cover 65% 600 cm low
8600050	○ Opal	C21 cover 65% 200 cm high
8600092	● Black	C42 cover 25% 200 cm

END CAPS

ART. NR.	COLOUR	TYPE
----------	--------	------

8101019	● Black	E58 end cap without cable entry
8101027	● Aluminium	E58 end cap without cable entry
8101023	○ White	E58 end cap without cable entry
8101029	● Black	E59 end cap with cable entry
8101028	● Aluminium	E59 end cap with cable entry
8101024	○ White	E59 end cap with cable entry

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
----------	--------	------

8101010	● Aluminium	Z34 mounting bracket
---------	-------------	----------------------

Profiles | Surface

PN4 LED PROFILE 200 CM | LED STRIPS MAX. 24MM

This PN4 LED profile of 200 cm is suitable for LED strips up to 24 mm wide.



GALAXY profiles


Type: Surface
Size: 2000 x 26,79 x 11,69 mm (L X W X H)
Max. width LED strip: 24 mm
Colour: Black (RAL9005) / aluminium / white (RAL9010)
Material: Anodized aluminum



ART. NR.	COLOUR
8201014	● Black
8201012	● Aluminium
8201013	○ White

COVERS

ART. NR.	COLOUR	TYPE
8600077	○ Opal	C30 cover 65% 200 cm
8600099	○ White	C47 cover 75% 200 cm
8600017	○ Opal	C10 cover 65% 200 cm low
8600036	○ Frosted	C19 cover 75% 200 cm low
8600078	○ White	C36 cover 75% 200 cm low
8600035	○ Clear	C18 cover 85% 200 cm low
8600072	● Black	C33 cover 25% 200 cm low
8600018	○ Opal	C11 cover 65% 200 cm medium
8600063	○ Clear	C35 cover 85% 200 cm medium
8600019	○ Opal	C12 cover 65% 200 cm high
8600068	○ Clear	C31 cover 85% 200 cm high
8600020	○ Opal	C13 cover 65% 200 cm round



END CAPS

ART. NR.	COLOUR	TYPE
8301016	● Black	E43 end cap without cable entry low
8301011	● Aluminium	E43 end cap without cable entry low
8301015	○ White	E43 end cap without cable entry low
8302013	● Black	E44 end cap without cable entry medium
8302011	● Aluminium	E44 end cap without cable entry medium
8302012	○ White	E44 end cap without cable entry medium
8303013	● Black	E45 end cap without cable entry high
8303011	● Aluminium	E45 end cap without cable entry high
8303012	○ White	E45 end cap without cable entry high
8304013	● Black	E46 end cap without cable entry round
8304011	● Aluminium	E46 end cap without cable entry round
8304012	○ White	E46 end cap without cable entry round

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8301510	● Aluminium	Z24 mounting bracket

Surface | Profiles

PN6N LED PROFILE 200 CM | LED STRIPS MAX. 24MM

This PN6N LED profile of 200 cm is suitable for LED strips up to 24 mm wide.



GALAXY profiles


Type: Surface

Size: 2000 x 26,79 x 26 mm (L X W X H)

Max. width LED strip: 24 mm

Colour: Black (RAL9005) / aluminium / white (RAL9010)


Material: Anodized aluminium

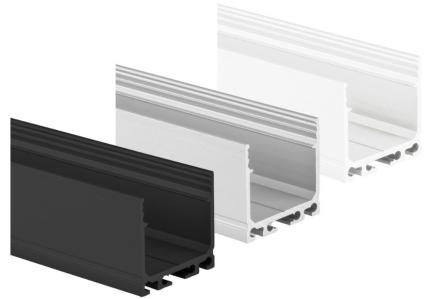

ART. NR.	COLOUR
8301019	● Black
8301017	● Aluminium
8301018	○ White

COVERS

ART. NR.	COLOUR	TYPE
8600077	○ Opal	C30 cover 65% 200 cm
8600099	○ White	C47 cover 75% 200 cm
8600017	○ Opal	C10 cover 65% 200 cm low
8600036	○ Frosted	C19 cover 75% 200 cm low
8600078	○ White	C36 cover 75% 200 cm low
8600035	○ Clear	C18 cover 85% 200 cm low
8600072	● Black	C33 cover 25% 200 cm low
8600018	○ Opal	C11 cover 65% 200 cm medium
8600063	○ Clear	C35 cover 85% 200 cm medium
8600019	○ Opal	C12 cover 65% 200 cm high
8600068	○ Clear	C31 cover 85% 200 cm high
8600020	○ Opal	C13 cover 65% 200 cm round



END CAPS

ART. NR.	COLOUR	TYPE
8301016	● Black	E47 end cap without cable entry low
8301011	● Aluminium	E47 end cap without cable entry low
8301015	○ White	E47 end cap without cable entry low
8302013	● Black	E48 end cap without cable entry medium
8302011	● Aluminium	E48 end cap without cable entry medium
8302012	○ White	E48 end cap without cable entry medium
8303013	● Black	E49 end cap without cable entry high
8303011	● Aluminium	E49 end cap without cable entry high
8303012	○ White	E49 end cap without cable entry high
8304013	● Black	E50 end cap without cable entry round
8304011	● Aluminium	E50 end cap without cable entry round
8304012	○ White	E50 end cap without cable entry round

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8301510	● Aluminium	Z24 mounting bracket

Surface | Profiles

PN17V2 LED PROFIEL 200 CM | LED STRIPS MAX. 30MM


This PN17V2 LED profile of 200 cm is suitable for LED strips up to 30 mm wide.



GALAXYprofiles

Type: Surface
Size: 2000 x 40 x 50 mm (L X W X H)
Max. width LED strip: 30 mm
Colour: Black (RAL9005) / zilver / white (RAL9010)
Material: Anodized aluminum / Powder coating (silver)

ART. NR.	COLOUR
8123364	● Black
8123363	● Silver
8123365	○ White



COVERS

ART. NR.	COLOUR	TYPE
8123383	○ Frosted	C67 lens cover 75% 200 cm
8123374	○ Frosted	C64 prismatic cover 75% 117,6 cm
8600004	○ Opal	C1 cover 65% 200 cm
8600026	○ Opal	C1 cover 65% 250 cm
8600080	○ Opal	C1 cover 65% 300 cm
8600037	○ Opal	C1 cover 75% 600 cm
8600003	○ Clear	C2 cover 85% 200 cm

END CAPS

ART. NR.	COLOUR	TYPE
8102023	● Black	E69 end cap without cable entry
8102027	● Silver	E69 end cap without cable entry
8102024	○ White	E69 end cap without cable entry

WIRE SUSPENSION

ART. NR.	COLOUR	TYPE
8123387	● Black	ZO4 wire suspension 300 cm
8123372	● Silver	ZO4 wire suspension 300 cm
8123386	○ White	ZO4 wire suspension 300 cm

Surface | Profiles

MP2 LED CONSTRUCTION PROFILE 200/300 CM | LED STRIPS MAX. 6MM

This MP2 LED profile of 200/300 cm is suitable for LED strips up to 6 mm wide.



GALAXY profiles


Type: Surface

Size: 2000/3000 x 21 x 9,89 mm (L X W X H)



Max. width LED strip: 6 mm

Colour: Black (RAL9005) / aluminium / white (RAL9010)

Material: Anodized aluminum

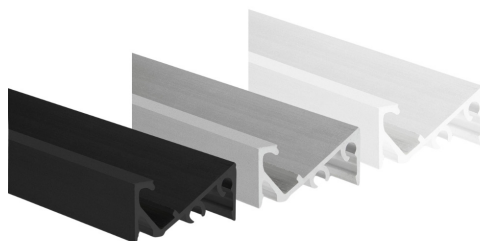

ART. NR.	COLOUR	LENGTH
8123172	● Black	200 cm
8123445	● Black	300 cm
8123171	● Aluminium	200 cm
8123173	○ White	200 cm



COVERS

ART. NR.	COLOUR	TYPE
8600106	○ Opal	C24 cover 65% 200 cm
8600107	○ Opal	C24 cover 65% 600 cm

END CAPS

ART. NR.	COLOUR	TYPE
8123198	● Black	E95 end cap without cable entry
8123197	● Aluminium	E95 end cap without cable entry
8123199	○ White	E95 end cap without cable entry

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8123202	● Aluminium	Z37 mounting bracket

Profiles | Recessed

PL3 LED PROFILE 200 CM | LED STRIPS MAX. 12MM

This PL3 LED profile of 200 cm is suitable for LED strips up to 12 mm wide.



GALAXY profiles


Type: Recessed

Size: 2000 x 23,07 x 13,03 mm (L X W X H)


Max. width LED strip: 12 mm

Colour: Black (RAL9005) / aluminium / white (RAL9010)

Material: Anodized aluminum

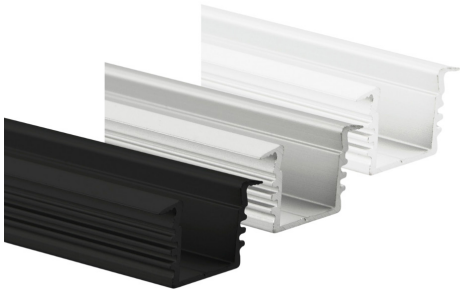

ART. NR.	COLOUR
8106033	● Black
8106032	● Aluminium
8106034	○ White



COVERS

ART. NR.	COLOUR	TYPE
8600004	○ Opal	C1 cover 65% 200 cm
8600037	○ Opal	C1 cover 65% 600 cm
8600003	○ Clear	C2 cover 85% 200 cm
8600070	● Black	C32 cover 25% 200 cm
8600071	● Black	C32 cover 25% 600 cm

END CAPS

ART. NR.	COLOUR	TYPE
8123203	● Black	E7 end cap without cable entry
8106135	● Grey	E7 end cap without cable entry
8123204	○ White	E7 end cap without cable entry
8123205	● Black	E8 end cap with cable entry
8106030	● Grey	E8 end cap with cable entry
8123206	○ White	E8 end cap with cable entry

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8106211	● Black	Z01 mounting bracket
8106210	● Aluminium	Z01 mounting bracket
8106212	○ White	Z01 mounting bracket

Recessed | Profiles

PL8 LED PROFILE 200 CM | LED STRIPS MAX. 12MM

This PL8 LED profile of 200 cm is suitable for LED strips up to 12 mm wide.



GALAXY profiles

Type: Recessed

Size: 2000 x 23,07 x 5,91 mm (L X W X H)


Max. width LED strip: 12 mm

Colour: Black (RAL9005) / aluminium / white (RAL9010)

Material: Anodized aluminum



ART. NR.	COLOUR
8106089	● Black
8106082	● Aluminium
8106088	○ White



COVERS

ART. NR.	COLOUR	TYPE
8600004	○ Opal	C1 cover 65% 200 cm
8600037	○ Opal	C1 cover 65% 600 cm
8600003	○ Clear	C2 cover 85% 200 cm
8600070	● Black	C32 cover 25% 200 cm
8600071	● Black	C32 cover 25% 600 cm

END CAPS

ART. NR.	COLOUR	TYPE
8106087	● Black	E25 end cap without cable entry
8106085	● Grey	E25 end cap without cable entry
8106086	○ White	E25 end cap without cable entry
8106084	● Black	E26 end cap with cable entry
8106080	● Grey	E26 end cap with cable entry
8106083	○ White	E26 end cap with cable entry

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8106211	● Black	Z01 mounting bracket
8106210	● Aluminium	Z01 mounting bracket
8106212	○ White	Z01 mounting bracket

Profiles | Recessed



SR1/2 LED COVER | TWIST+BEND | LED STRIPS MAX. 10/12MM

These SR1 and SR2 silicone, flexible covers of 500 and 2000 cm are suitable for LED strips up to 10 and 12 mm wide. They allow bending angles of up to 100 mm horizontally and 50 mm vertically.



GALAXY profiles

Type: Recessed
Size: 5.000/20.000 x 10 (SR1) 15 (SR2) x 10 mm (L X W X H)
Max. width LED strip: 10 (SR1) 12 (SR2) mm
Colour: Black / opal
Material: Silicone

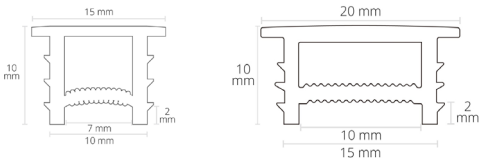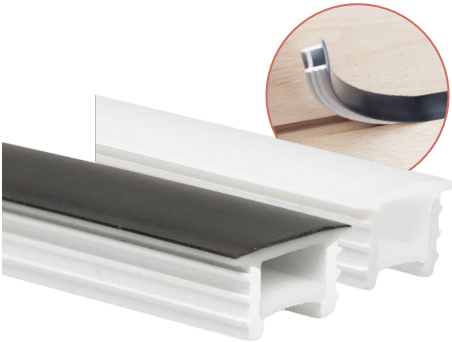

COVERS

ART. NR.	COLOUR	TYPE	MAX. WIDTH LED STRIP
8123426	○ Opal	SR1 cover 65% 500 cm	10 mm
8123427	○ Opal	SR1 cover 65% 2000 cm	10 mm
8123424	● Black	SR1 cover 25% 500 cm	10 mm
8123425	● Black	SR1 cover 25% 2000 cm	10 mm
8123430	○ Opal	SR2 cover 65% 500 cm	12 mm
8123431	○ Opal	SR2 cover 65% 2000 cm	12 mm
8123428	● Black	SR2 cover 25% 500 cm	12 mm
8123429	● Black	SR2 cover 25% 2000 cm	12 mm

Watch the
instructional
video here



Corner | Profiles

PO23 LED CORNER PROFILE 200 CM | LED STRIPS MAX. 11MM

This PO23 LED profile of 200 cm is suitable for LED strips up to 11 mm wide.



GALAXY profiles


Type: Surface

Size: 2000 x 25,66 x 17,51 mm (L X W X H)

Max. width LED strip: 11 mm


Colour: Black (RAL9005) / aluminium / white (RAL9010)

Material: Anodized aluminum

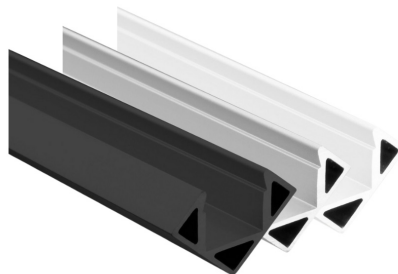

ART. NR.	COLOUR
8104054	● Black
8104052	● Aluminium
8104053	○ White

8104054	● Black
8104052	● Aluminium
8104053	○ White



COVERS

ART. NR.	COLOUR	TYPE
8600013	○ Opal	C8 cover 65% 200 cm
8600056	○ Opal	C8 cover 65% 600 cm
8600012	○ Clear	C9 cover 85% 200 cm
8600109	● Black	C52 cover 25% 200 cm
8600110	● Black	C52 cover 25% 600 cm

8600013	○ Opal	C8 cover 65% 200 cm
8600056	○ Opal	C8 cover 65% 600 cm
8600012	○ Clear	C9 cover 85% 200 cm
8600109	● Black	C52 cover 25% 200 cm
8600110	● Black	C52 cover 25% 600 cm

END CAPS

ART. NR.	COLOUR	TYPE
8103055	● Black	E41 end cap without cable entry
8103050	● Grey	E41 end cap without cable entry
8103053	○ White	E41 end cap without cable entry
8103056	● Black	E42 end cap with cable entry
8103052	● Grey	E42 end cap with cable entry
8103054	○ White	E42 end cap with cable entry

8103055	● Black	E41 end cap without cable entry
8103050	● Grey	E41 end cap without cable entry
8103053	○ White	E41 end cap without cable entry
8103056	● Black	E42 end cap with cable entry
8103052	● Grey	E42 end cap with cable entry
8103054	○ White	E42 end cap with cable entry

MOUNTING BRACKET

ART. NR.	COLOUR	TYPE
8104050	● Aluminium	Z02 mounting bracket

8104050	● Aluminium	Z02 mounting bracket
---------	-------------	----------------------



Check our complete
catalog range online



Notes

This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



CARE



SHARE



CONNECT



Tronix / Vluchtoord 41, 5406 XP Uden / Postbus 205, 5400 AE Uden / The Netherlands
+31 (0)413 330 380 / sales@tronixlighting.com / www.tronixlighting.com

